

Lugged & Tapped Butterfly Valve - EPDM Liner

2" to 12"



ISO 5211 for Direct Mount, Epoxy Coated Ductile Iron Body, 316 Stainless Steel Disc, EPDM Liner, Locking Lever Operation 1" to 10", Gearbox Operation 12" to 24", Complies with 97/23/CE (PED) Directive CE 1115




Pressure / Temperature Specifications

Pressure	PN16 1" to 16"
	PN10 18" to 24"
Temperature	-10°C to 120°C (130°C Peak)

Material Specifications

1. Body	EN GJS 400 - 15 Ductile Iron
2. Disc	CF8M Stainless Steel
3. Stem	AISI 420 Stainless Steel
4. Liner	EPDM
5. Bushing	PTFE
6. Washer	Galvanised Carbon Steel
7. Circlip	Spring Steel
8. O-ring	Viton
9. Lever (1" to 10")	1" to 6" Aluminium 8" & 10" EN GJS 400 - 15 Ductile Iron
10. Bolts	AISI 201 Stainless Steel

Pressure / Temperature Chart

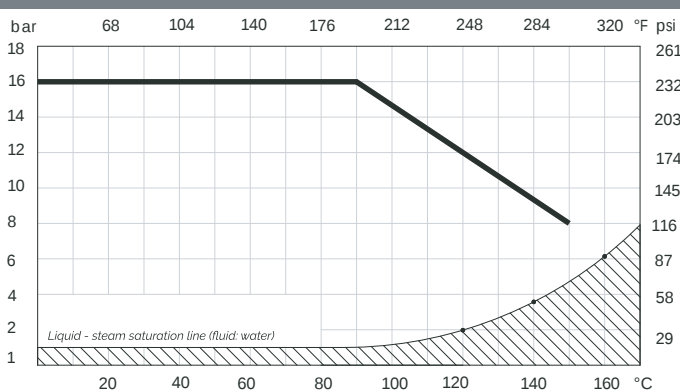

Weight

Size	with Lever	with Gearbox
1"	2.6	6.6
1¼"	2.6	6.6
1½"	2.3	6.3
2"	3.2	7.2
2½"	4.1	8.1
3"	5.4	9.2
4"	6.7	10.5
5"	9.6	12.9
6"	10.8	14.1
8"	21.1	28.4
10"	32.7	42.0
12"	-	50.5
14"	-	79.3
16"	-	122.6
18"	-	154.8
20"	-	228.3
24"	-	308.6

Operating Torque (Nm)

Size	3 Bar	6 Bar	10 Bar	16 Bar
1"	2.9	3.1	3.3	3.4
1¼"	4.7	5.1	5.4	5.7
1½"	7.8	8.4	8.8	9.2
2"	11.3	12.0	13.0	13.0
2½"	17.0	18.0	20.0	21.0
3"	23.0	25.0	26.0	28.0
4"	33.0	36.0	40.0	44.0
5"	48.0	54.0	61.0	68.0
6"	68.0	78.0	88.0	99.0
8"	120.0	134.0	148.0	162.0
10"	189.0	212.0	234.0	257.0
12"	290.0	316.0	342.0	367.0
14"	298.0	347.0	396.0	550.0
16"	481.0	551.0	622.0	850.0
18"	--- Please confirm with sales ---			
20"	--- Please confirm with sales ---			
24"	--- Please confirm with sales ---			



2" to 12"



Mounting Plate Dimensions

Size	ISO	G	J	No x Øq	S	E
1"	F05	65	50	4 x 7	7	32
1¼"	F05	65	50	4 x 7	7	32
1½"	F05	65	50	4 x 7	9	21
2"	F05	65	50	4 x 7	9	21
2½"	F05	65	50	4 x 7	9	21
3"	F05	65	50	4 x 7	11	21
4"	F05	65	50	4 x 7	11	21
5"	F07	90	70	4 x 9	14	27
6"	F07	90	70	4 x 9	14	27
8"	F10	125	102	4 x 11	17	27
10"	F12	150	125	4 x 13	27	27
12"	F12	150	125	4 x 13	27	27
14"	F12	150	125	4 x 13	27	27
16"	F12	150	125	4 x 13	27	27
18"*	F16	210	165	4 x 22	27	51
20"*	F16	210	165	4 x 22	36	64
24"*	F16	210	165	4 x 22	36	70

*Topworks dimensions may vary; please contact sales for confirmation.

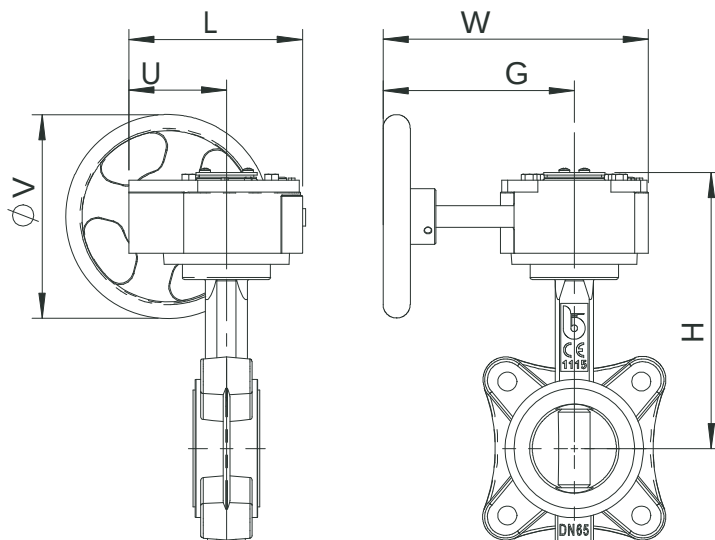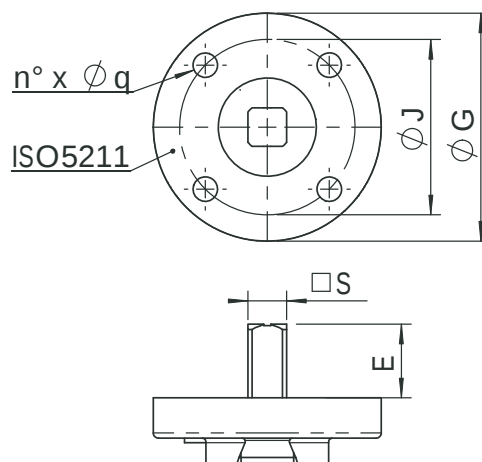


Dimensions with Gearbox

Size	L	U	H	W	G	V
1"	130	77	166	225	170	150
1¼"	130	77	172	225	170	150
1½"	130	77	178	225	170	150
2"	130	77	188	225	170	150
2½"	130	77	198	225	170	150
3"	130	77	212	225	170	150
4"	130	77	232	225	170	150
5"	130	77	242	225	170	150
6"	130	77	262	225	170	150
8"	180	104	308	338	260	300
10"	205	124	346	345	260	300
12"	205	124	372	345	260	300
14"	205	124	448	345	260	300
16"	278	118	497	291	167	380
18"	248	124	527	395	270	385
20"	*	*	630	*	*	*
24"	*	*	562	*	*	*

*Please see following page for 20 & 24" gearbox dimensions.

2" to 12"

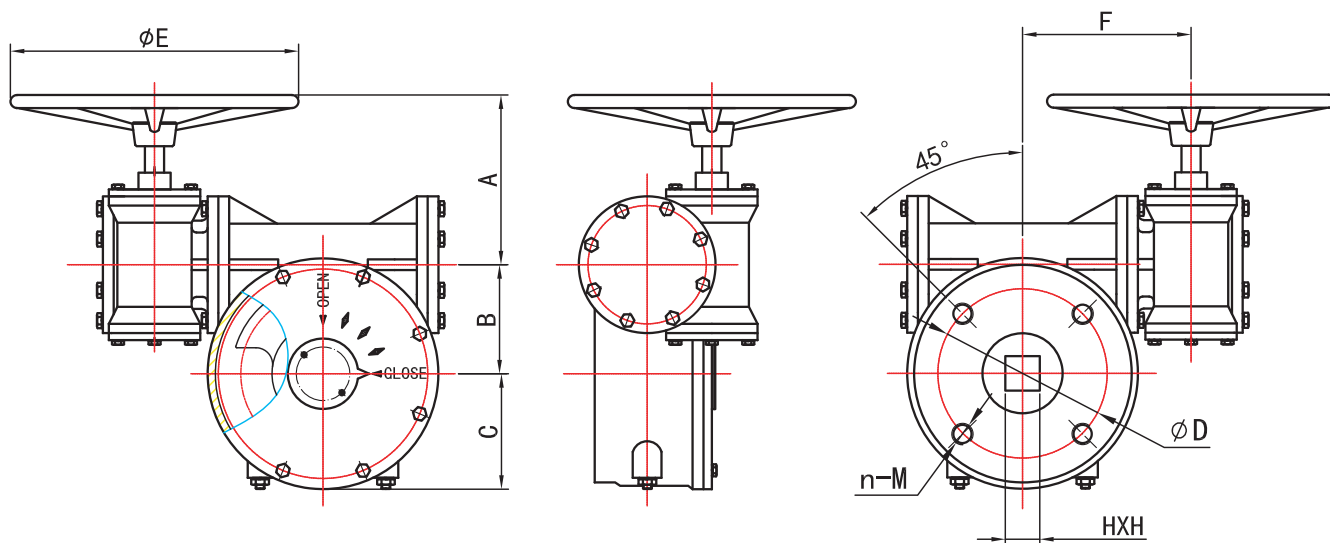

Size	A	B	C	ØE	F	ØD	N - M	H x H	ISO
20"	154	100	107	385	169	165	4 x M20	36 x 36	F16
24"	154	100	107	385	169	165	4 x M20	36 x 36	F16

Lugged & Tapped Butterfly Valve - EPDM Liner


2" to 12"



KV Values

Size	10°	20°	30°	40°	50°	60°	70°	80°	90°
1"	--- please confirm with sales ---								
1¼"	--- please confirm with sales ---								
1½"	0.04	2.1	4.8	10.0	19.0	30.0	48.0	73.0	79.0
2"	0.05	2.6	6.0	13.0	23.0	38.0	60.0	91.0	99.0
2½"	0.00	3.8	14.0	33.0	53.0	75.0	98.0	108.0	108.0
3"	0.17	7.8	16.0	34.0	60.0	100.0	158.0	237.0	261.0
4"	0.26	15.0	31.0	67.0	120.0	199.0	314.0	471.0	518.0
5"	0.43	25.0	53.0	115.0	205.0	339.0	535.0	803.0	883.0
6"	0.69	39.0	82.0	177.0	316.0	522.0	827.0	1241.0	1364.0
8"	2.6	52.0	142.0	250.0	450.0	713.0	1122.0	1723.0	2716.0
10"	2.6	130.0	276.0	599.0	1068.0	1768.0	2798.0	4196.0	4611.0
12"	3.5	202.0	427.0	926.0	1650.0	2730.0	4322.0	6483.0	7124.0
14"	5.2	292.0	617.0	1376.0	2384.0	3945.0	6243.0	9364.0	10291.0
16"	6.9	401.0	849.0	1839.0	3279.0	5425.0	8585.0	12878.0	14152.0
18"	9.5	531.0	1124.0	2437.0	4342.0	7185.0	11371.0	17057.0	18743.0
20"	12.0	683.0	1445.0	3133.0	5609.0	9238.0	14620.0	21930.0	24099.0
24"	19.0	1055.0	2234.0	4840.0	8626.0	14272.0	22587.0	33882.0	37232.0

Head Loss Chart (Fluid: Water [1m H₂O = 0.098 Bar] Head Loss with Valve Fully Opened)

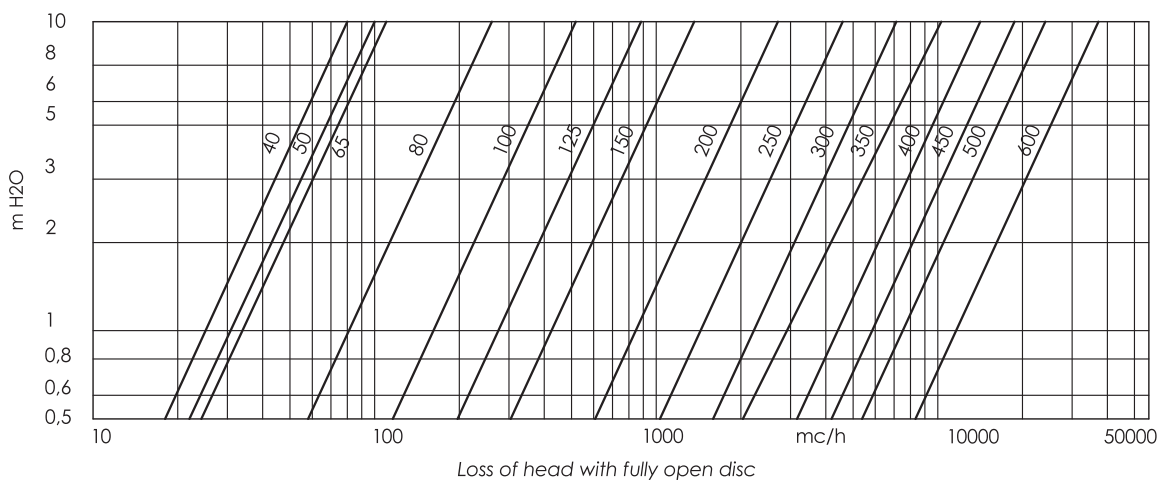

Flow Rate / Opening Position Chart (Flow percentage on the flow at full opening under the same head loss)

