




Stainless Steel 3 Piece Spring Check Valve

- Available in BSP threads, butt weld or socket weld ends
- Can be installed in any position
- Suitable for saturated steam up to 10 bar

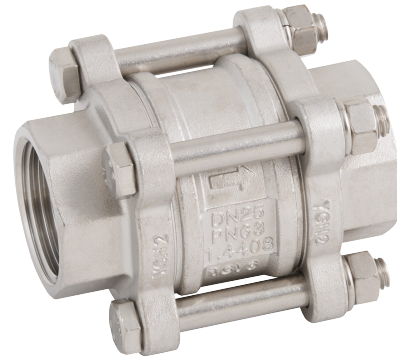

Butt Weld




Socket Weld



Working Temperature:
-25°C to +180°C




Maximum Working
Pressure:
63 bar

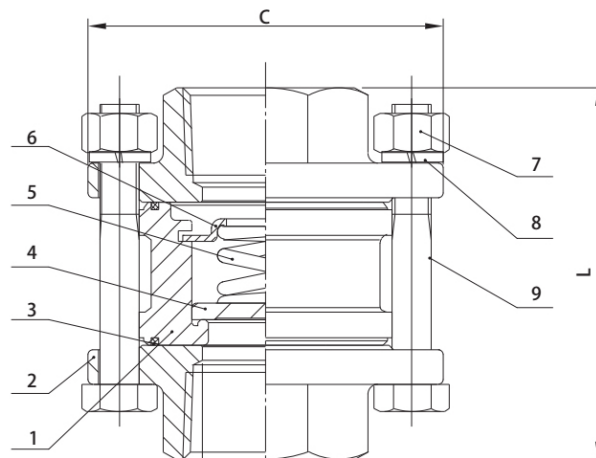

Dimensions

Size	DN	C	D		L		Kg
			Butt Weld	Socket Weld	Butt Weld	Socket Weld	
1/2"	15	53.50	23	21.70	56.50	56.50	0.30
3/4"	20	62.50	28	27.10	65	67	0.43
1"	25	71	34	33.80	74	74.50	0.61
1.1/4"	32	88	41	42.50	83	83	1
1.1/2"	40	95	49	48.60	92	91	1.32
2"	50	117	61	61.10	110	110.50	2.14
2.1/2"	65	147	78	77	125.50	125.50	4
3"	80	167	94	89.80	141	141	5.71
4"	100	224	115	115.20	164	162	10

Stainless Steel 3 Piece Spring Check Valve

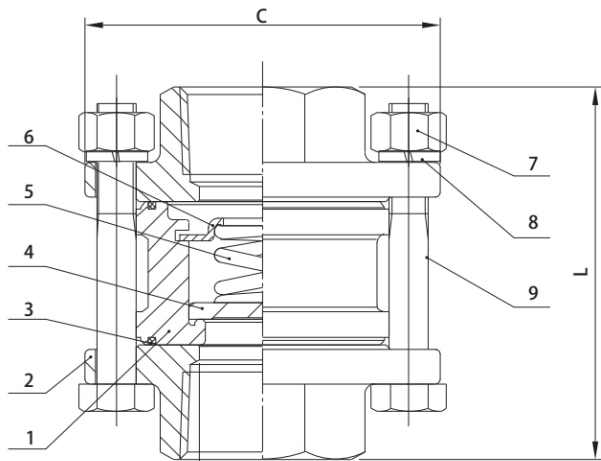

	Part Description	Material
1	Body	CF8M
2	Cap	PTFE
3	Seat	CF8M
4	Disc	
5	Spring	SS 316
6	Stopper	
7	Nut	SS 304
8	Washer	
9	Bolt	

